

INSTALL INSTRUCTIONS C-TCB-9 1989-2001 JEEP CHEROKEE

TOOLS REQUIRED:

3/16" Allen wrench
3/8" Standard socket set
3/8" Metric socket set


Ratcheting wrench (3/8" drive)
Powered drill w/ 3/16" drill bit
Open-end wrench set

HARDWARE & COMPONENTS:

<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART #</u>
1	Pole support assembly	CM93071-9
1	Telescoping pole assembly	CM93072-3
1	Side support brace	CM93146
1	5/16" Flat washer	GSM31006
1	5/16-18 Nylock nut	GSM30017
2	1/4" x 3/4" Hex head lag bolt	GSM33060-1

Always!

- Read all instructions before installing any Havis-Shields Equipment Corp products.
- Check for obstructions (Wire, brake lines, fuel tank, etc.) before drilling any holes!
- Use hardware provided with install kit

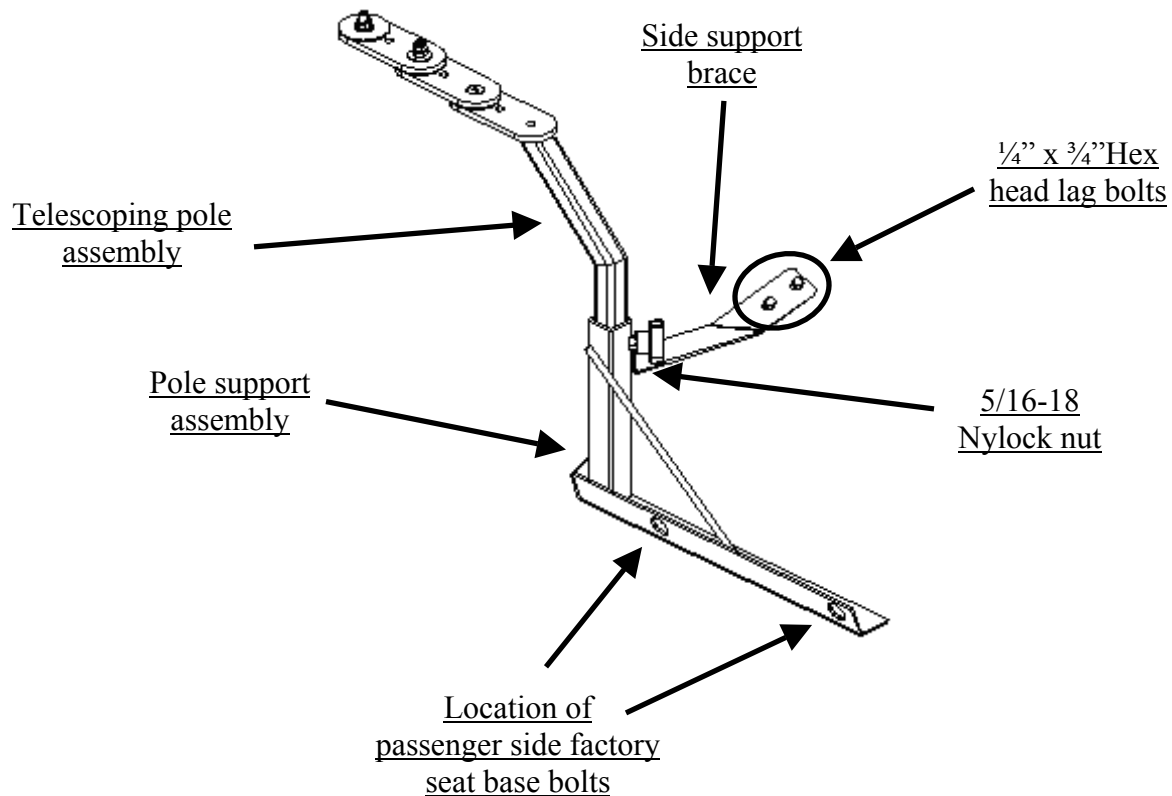

SUB ASSEMBLY:

1. Confirm receipt of all hardware and components.
2. Remove front inner and outer passenger seat bolts on vehicle.

INSTALLATION:

1. Mount C-TCB-9 into vehicle:

- Position pole support assembly between seat base mount and floor of vehicle
- Align holes in pole support assembly with holes in seat base.
- Loosely attached factory seat bolts that were removed during subassembly.
- Mount side support brace to threaded rod located on pole support assembly using a 5/16-18 Nylock nut
- Mount side support brace to vehicle using 1/4" x 3/4" Hex head lag bolts. A 3/16" pilot is required.

Note: When mounting side support brace to floor of vehicle, be sure to check for obstructions prior to drilling or lag bolting to floor.

- Tighten down passenger side factory seat bolts and 5/16-18 nylock nut holding side support brace to pole support assembly.
- Mount optional C-3090, computer-mounting platform, to telescoping pole assembly using hardware and instructions provided with C-3090.